

DATA SHEET SWISSCAVE WL155DF

Technical Data

Exterior

| | |
|--|--|
| Casing | Black coated steel |
| Door glazing | Fully glazed UV-resistant, gas-filled, with low energy panes equipped glass door (double glazed) |
| Door frame | Filigree edging made of black anodised, brushed aluminium |
| Door handle | Anodised, brushed aluminium (optionally available) |
| Door lock | Yes |
| Door hinge | Right |
| Door hinge convertible as option (right to left) | Yes |
| Product dimensions without door handle (H/W/D) | 820 x 595 x 585 mm |
| Packaging dimensions (H/W/D) | 880 x 635 x 640 mm |

Interior

| | |
|--|------------------------------|
| Temperature zones | 2 |
| Lighting | Blue ceiling lighting |
| Lighting on/off switch | Yes |
| Number of shelves total | 4 |
| Shelf material | Beech wood |
| Telescopic shelves on extendable steel ball bearings | Full extension shelves (80%) |
| Inside casing | Black PUR |

Scope of functions


| | |
|--|--|
| Optimal usage | Long-term storage and aging |
| User interface | 2 digital displays (set and actual temp.) |
| Active carbon filters (ensuring optimal air quality) | Yes (2) |
| Compressor | Embraco Fullmotion (speed-controlled) |
| Coolant | R600a (environment friendly) |
| Vibrationfree implementation | Yes |
| Cooling system | Combined fan and convection cooling |
| Temperatur Memory Function (Power failure) | Yes |
| Condensation water container | Yes |
| Heating | Powerful winter heating function (*In heating mode, temperature and humidity values may vary from the set value) |
| Acoustic temperature alarm | Yes |
| Acoustic door alarm | Yes |
| Feet adjustable to compensate uneven floors | Yes |

Performance data

| | |
|---|--|
| Humidity | Recommendation 50-70% |
| Actively managed humidity (adjustment range 60-80%) | |
| Climate classification | SN-T |
| Volume | 119 l |
| Noise level | 38 dB(A) sound-absorbing recommendation |
| Temperature range lower zone | 5 °C - 16 °C |
| Temperature range upper zone | 9 °C - 20 °C |
| Temperature delta between zones | 1 °C - 2 °C |

General Information

| | |
|---|---|
| Cooler shape | Free-standing or embeddable with shadow gap |
| Maintenance contract (warranty extension) | Recommended |
| Transport weight | 52 kg |
| Net weight | 50 kg |
| Power consumption per day | 0.42 kWh (ca.) |
| Voltage | 220 V / 50 Hz |
| Cable length | 2 m |

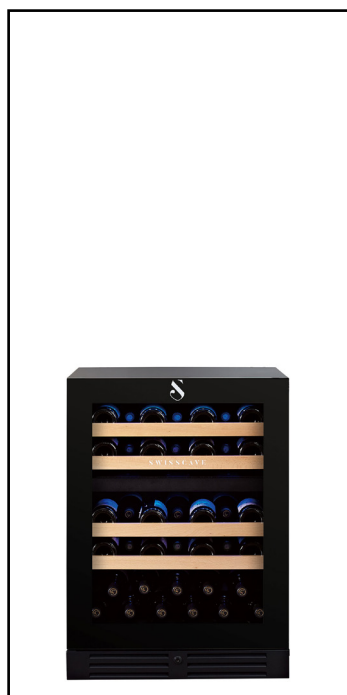

ENERGY label showing a G rating, 155 kWh/annum consumption, and 39 bottles capacity. The label includes the European Union energy efficiency scale from A to G, with G being the lowest (most inefficient) rating. It also shows a noise level of 38 dB(A) and a QR code for more information.